

Hoses characteristics


- polyurethane hose (blue) with protection spring on connection
- outlet brass swivel joint
- brass fitting
- inlet connection 1,5 m

Swivel joint to facilitate the use of air-operated tools


Hose anti-bending spring



To prevent removal or theft of the hose reel, it can be secured with a bolt or padlock.

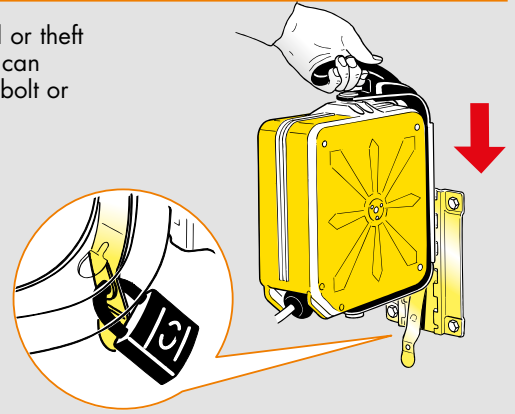

Easy connection and disconnection of the reel

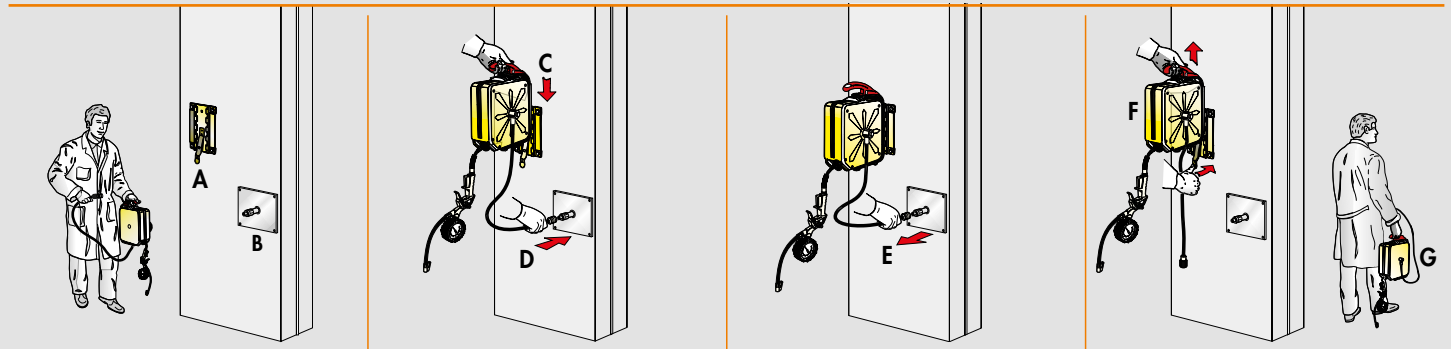

Quick Hooking and quick Release of the hose reel at every work point. Bayonet bracket easy wall-mounting (A), quick connection to compressed-air system (B), quick connection of hose-reel to wall bracket (C), quick connection of hose reel to compressed-air system (D). Release: quick release from compressed-air system (E), quick release of hose-reel from wall bracket (F), easy to carry handle reduced weight (G).

Wall support with bayonet hooking

P/N 260/01

Series 260 hose reels are equipped with a **wall bracket with bayonet hooking**. The placing of several brackets in the service points allows the hose reel to be easily moved to the various workstations.

