


## PAINTED STEEL Fixed - Swivelling

Series

**FIXED-OPEN**

**SWIVELLING-ENCLOSED**

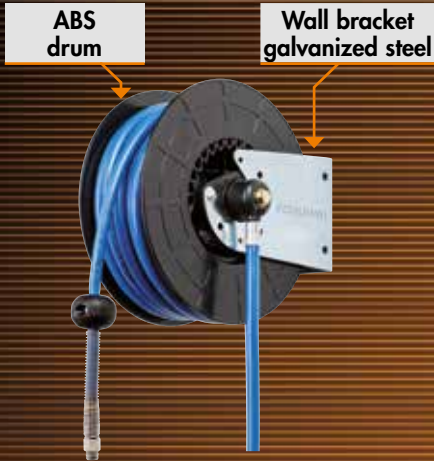

**S. 250**



**S. 250**

**S. 300**

Practical and robust solutions for daily use for inside and outside installation as well. The enclosed series are painted with epoxy resins with a min thickness of 80 micron and subjected to a "salty fog" corrosion test. Easy to install in every location: on the wall, on the floor, on the ceiling or mounted on a vehicle.

Fluid - Pressure	PAINTED STEEL			STAINLESS STEEL		
	Joint	Seals	Central shaft	Joint	Seals	Central shaft
Air, Water 40°C 20 bar	brass	Viton®	Delrin	-	-	-
Water Detergent 70°C 20 bar	-	-	-	stainless steel AISI 304	Viton®	Delrin



270-300  
350-430

### USES

