

Hoses characteristics

Swivel joint to facilitate the use of air-operated tools

Hose anti-bending spring




- polyurethane hose (blue) with protection spring on connection
- outlet brass or stainless steel swivel joint
- brass fittings
- inlet connection 1,5 m

Wall support for bayonet hooking for S. 250 - 300 enclosed

P/N 260/02

Hose reels **series 250 and 300**, may be supplied on request with a wall support for bayonet hooking. Placing 2 or more wall supports it is possible to move easily the reel in different working place.

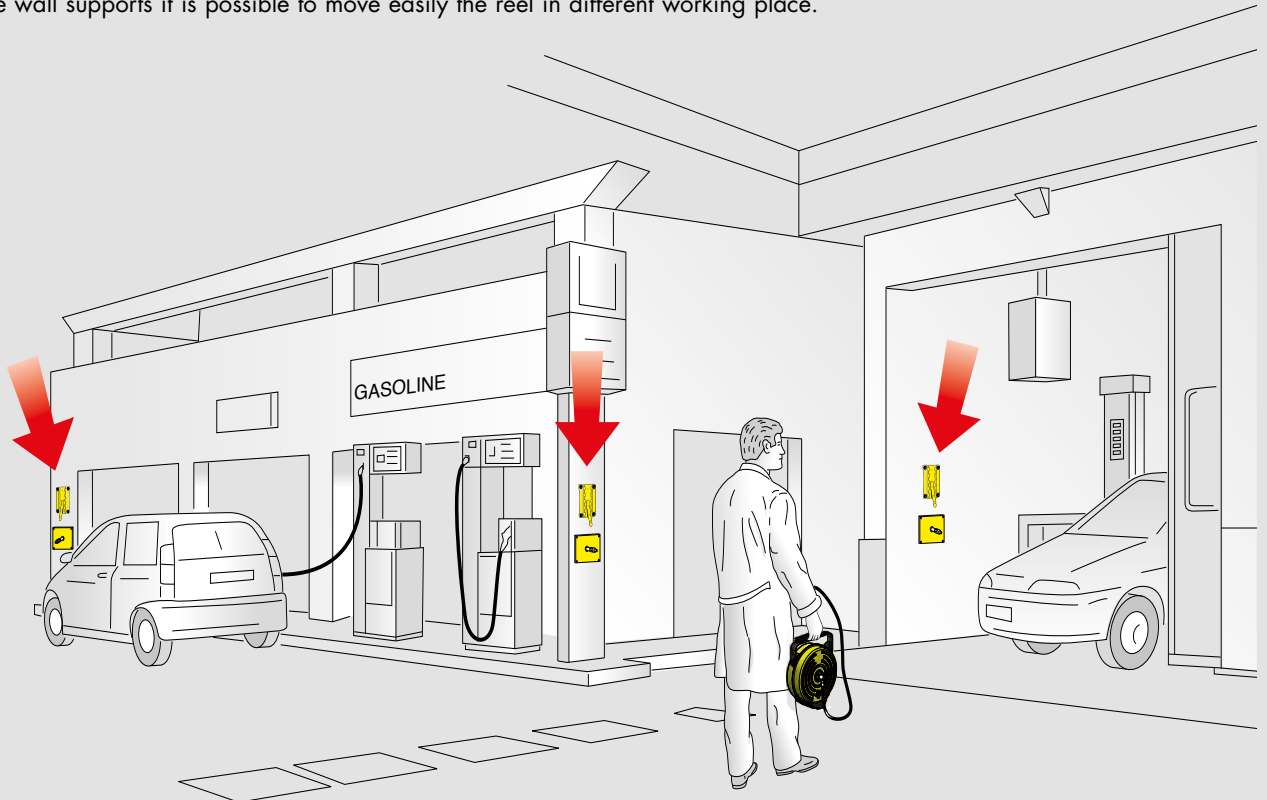

Hose guide for S. 250 open

P/N 260/05

Hose guide with 4 opposed rollers for application of service columns in technopolymer.

