

## PORTABLE WASTE OIL DRAINER (16 - 24 l)

### P/N OE43016

**Air-operated waste oil drainer with portable 16-litre tank**, equipped with:  
 ► level gauge ► P/N OE45560 set of probes (refer to page 22)

No.1 packing m<sup>3</sup> 0,080 kg 10,5 OVERALL DIMENSIONS P:255 H:845 L:225 mm



### P/N OE43024


**Air-operated waste oil drainer with wheel-mounted 24-litre tank**, equipped with:  
 ► level gauge ► P/N OE45560 set of probes (refer to page 22)

No.1 packing m<sup>3</sup> 0,090 kg 13 OVERALL DIMENSIONS P:280 H:920 L:330 mm



P/N		OE43016	OE43024
Tank capacity	litres	16	24
Max draining capacity	litres	13	20
Air pressure for depressurization	bar	6,5 - 7	6,5 - 7
Suction speed at 70°-80°C	l/min	1,5 - 2	1,5 - 2
Total suction capacity	litres	9 - 10	15 - 16
Suction hose	m	2	2

### HOW TO USE

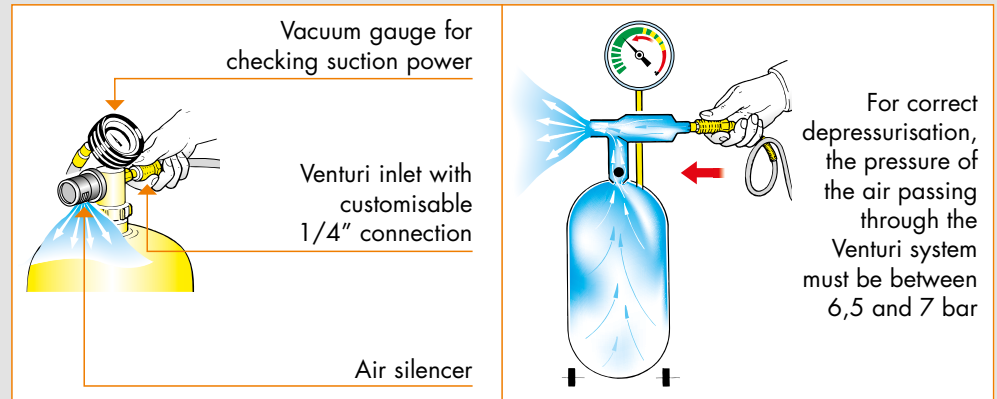

## STANDARD WASTE OIL DRAINER (65 - 90 l)

### P/N OE43060

**Air-operated waste oil drainer with wheel-mounted 65-litre tank**, equipped with:  
 ► level gauge ► removable tool tray  
 ► P/N OE45560 set of probes (refer to page 22)

No.2 packing m<sup>3</sup> 0,230 kg 26,9 OVERALL DIMENSIONS P:600 H:860 L:420 mm



### P/N OE43090

**Air-operated waste oil drainer with wheel-mounted 90-litre tank**, equipped with:  
 ► level gauge ► removable tool tray  
 ► P/N OE45560 set of probes (refer to page 22)

No.2 packing m<sup>3</sup> 0,250 kg 31,4 OVERALL DIMENSIONS P:640 H:1000 L:420 mm

P/N		OE43060	OE43090
Tank capacity	litres	65	90
Max draining capacity	litres	52	75
Air pressure for depressurization	bar	6,5 - 7	6,5 - 7
Suction speed at 70°-80°C	l/min	1,5 - 2	1,5 - 2
Total suction capacity	litres	43 - 45	60 - 65
Suction hose	m	2	2
Draining hose	m	2	2
Max pressure for draining	bar	0,5	0,5

⚠ The above items must not be used with flammable or corrosive fluids