

**Ratio 1:1**  
**Flow rate 35 l/min**




P/N OE26090

P/N OE26094


## AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 500

P/N	OE26090	OE26091	OE26093	OE26094
Seals	Viton®			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminum			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F3/4"G	F3/4"G	F3/4"G	F3/4"G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	250	250	250
Noise level	dB	81	81	81
Max deliverable oil viscosity	SAE	80	80	80
Bung adaptor	-	OE38051	OE38051	OE38051
Suitable for drums or tank	modular	customisable 1"	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing	No.- m <sup>3</sup>	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	5,5	6,0	7,2
Dimensions (A x B x C)	mm	332 - 208 - 50	332 - 168 - 50	332 - 740 - 50

PUMP AIR FEEDING PRESSURE  
**A A** 8 bar 116 psi  
**B B** 6 bar 87 psi  
**C C** 4 bar 58 psi

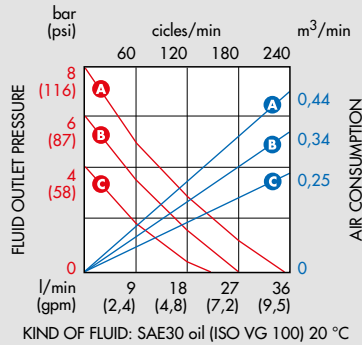

OVERALL DIMENSIONS



**Ratio 1:1**  
**Flow rate 23 l/min**




P/N OE33060

P/N OE33096

## AIR-OPERATED PUMPS FOR TRANSFER OIL AND SIMILAR S. 600

P/N	OE33060	OE33094	OE33096
Seals	Teflon®		
Compatible fluids	Oil, lubricants and similar		
Suction tube upper body	Aluminum		
Suction tube	Carbon steel		
Air inlet connection	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G
Air working pressure	bar	6 - 8	6 - 8
Average air consumption	l/min	230	230
Noise level	dB	81	81
Max deliverable oil viscosity	SAE	80	80
Bung adaptor	-	-	OE38042 standard
Suitable for drums or tank	modular	for drums 180 - 220 Kg	for drums 180 - 220 Kg
Packing	No.- m <sup>3</sup>	1 - 0,006	1 - 0,020
Weight	Kg	4,3	6,2
Dimensions (A x B x C)	mm	355 - 0 - 0	355 - 940 - 42

PUMP AIR FEEDING PRESSURE  
**A A** 8 bar 116 psi  
**B B** 6 bar 87 psi  
**C C** 4 bar 58 psi

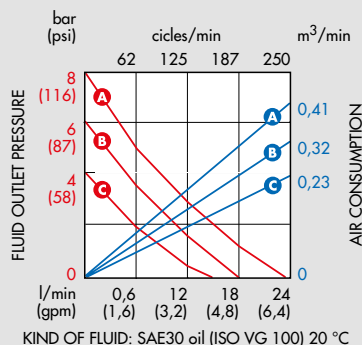

OVERALL DIMENSIONS

