

**Ratio 3:1**  
**Flow rate 20 l/min**




P/N OE35060


P/N OE35094

## AIR-OPERATED PUMPS FOR OIL AND SIMILAR S. 500

P/N	OE35060	OE35061	OE35076	OE35094
Seals	Viton®			
Compatible fluids	Oil, lubricants and similar			
Suction tube upper body	Aluminum			
Suction tube	Carbon steel			
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G	F1/2"G
Air working pressure bar	6 - 8	6 - 8	6 - 8	6 - 8
Average air consumption l/min	350	350	350	350
Noise level dB	81	81	81	81
Max deliverable oil viscosity SAE	130	130	130	130
Bung adaptor	-	OE38046	OE38046	OE38046
Suitable for drums or tank	modular	customisable 1"	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing No.-m <sup>3</sup>	1 - 0,01	1 - 0,01	1 - 0,01	1 - 0,01
Weight Kg	5,35	5,8	5,8	6,5
Dimensions (A x B x C) mm	332 - 200 - 32	332 - 185 - 32	332 - 740 - 32	332 - 940 - 32

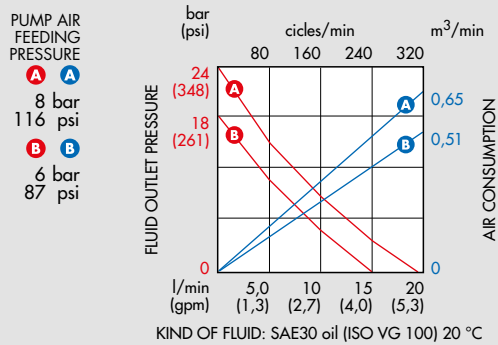

OVERALL DIMENSIONS



**Ratio 3:1**  
**Flow rate 14 l/min**




P/N OE35160

P/N OE35196

## AIR-OPERATED PUMPS FOR OIL AND SIMILAR S. 600

P/N	OE35160	OE35161	OE35163	OE35173	OE35194
P/N				OE35176	OE35196
Seals	NBR				
Compatible fluids	Oil, lubricants and similar				
Suction tube upper body	Aluminum				
Suction tube	Carbon steel				
Air inlet connection	F1/4"G	F1/4"G	F1/4"G	F1/4"G	F1/4"G
Fluid outlet connection	F1/2"G	F1/2"G	F1/2"G	F1/2"G	F1/2"G
Air working pressure bar	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8
Average air consumption l/min	330	330	330	330	330
Noise level dB	81	81	81	81	81
Max deliverable oil viscosity SAE	130	130	130	130	130
Bung adaptor	-	OE38042	OE38042	standard on OE35176	standard on OE35196
Suitable for drums or tank	modular	customisable 1"	tank	for drums 50 - 60 Kg	for drums 180 - 220 Kg
Packing No.-m <sup>3</sup>	1 - 0,01	1 - 0,01	1 - 0,02	1 - 0,020	1 - 0,020
Weight Kg	4,4	5,0	6,8	5,8	6,5
Dimensions (A x B x C) mm	285-285-42	285-220-42	285-125-42	285-740-42	285-940-42

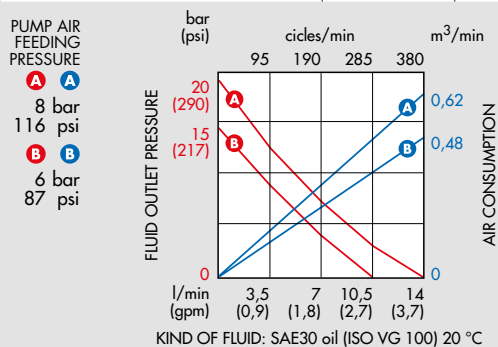

OVERALL DIMENSIONS

