

Ex In accordance with ATEX directive II 3 GD c TX


Ratio 5:1
Flow rate 45 l/min



P/N OE90C/51


INDUSTRIAL AIR-OPERATED PUMPS S. 900

P/N	OE90C/51	
Seals	Polyurethane	
Compatible fluids	Oil, lubricants and similar	
Suction tube upper body	Aluminum	
Suction tube	Carbon steel	
Air inlet connection	F1/2"G	
Fluid outlet connection	F3/4"G	
Air max pressure	bar	8
Max air consumption 8 bar	m ³ /min	1,6
Noise level	dB	80
Suitable for drums or tank	modular	
Packing	No. - m ³	1 - 0,040
Weight	Kg	12
Dimensions (A x B x C)	mm	430 - 230 - 62

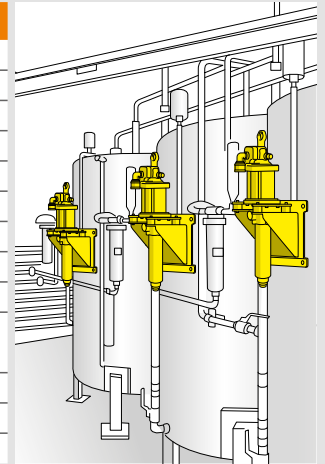


PUMP AIR FEEDING PRESSURE

A	A
8 bar	116 psi
B	B
6 bar	87 psi
C	C
4 bar	58 psi

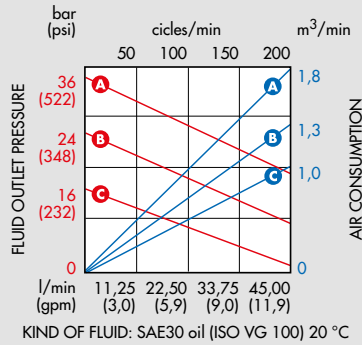

OVERALL DIMENSIONS



Ex In accordance with ATEX directive II 3 GD c TX

Ratio 7:1
Flow rate 30 l/min



P/N OE92C/71




P/N OE90C/71

INDUSTRIAL AIR-OPERATED PUMPS S. 900

P/N	OE90C/71	OE91C/71
Seals	Polyurethane	
Compatible fluids	Oil, lubricants and similar	
Suction tube upper body	Aluminum	
Suction tube	Carbon steel	
Air inlet connection	F1/2"G	F1/2"G
Fluid outlet connection	F3/4"G	F3/4"G
Air max pressure	bar	8
Max air consumption 8 bar	m ³ /min	1,6
Noise level	dB	80
Suitable for drums or tank	modular	for drums 180 - 220 Kg
Packing	No. - m ³	1 - 0,040
Weight	Kg	11
Dimensions (A x B x C)	mm	430 - 270 - 53

PUMP AIR FEEDING PRESSURE

A	A
8 bar	116 psi
B	B
6 bar	87 psi
C	C
4 bar	58 psi

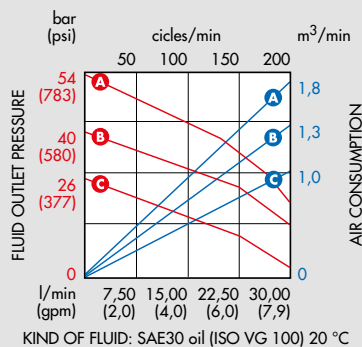

OVERALL DIMENSIONS

