

**Ex** In accordance with ATEX directive II 3 GD c X (only for series 4430 ABS)

IIB 2 GD c T4 T135°C X



**Supplied with:**


- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in galvanized steel or s. steel AISI 304
- Polyurethane seals
- central shaft in galvanized steel or stainless steel AISI 304
- inlet hose 0,6 m to connect the hose reel to the system (standard on the versions with hose)
- shock proof drum in painted steel or ABS

For the SWIVELLING version add the suffix "/SO" at the P/N.  
For example 430/40/SO

## INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 430 150 bar	430/40	without hose	F 1/2"G	F 1/2"G
	430/41	10m 1/2" (963/11)	F 1/2"G	M 1/2"G
	430/42	15m 1/2" (963/15)	F 1/2"G	M 1/2"G
S. 430 100 bar	430/415	without hose	F 1/2"G	F 1/2"G
	430/416	10m 5/8" (993/310)	F 3/4"G	M 3/4"G
	430/417	8m 3/4" (973/308)	F 3/4"G	M 3/4"G
S. 4430 ABS 150 bar	4430/40	without hose	F 1/2"G	F 1/2"G
	4430/41	10m 1/2" (963/11)	F 1/2"G	M 1/2"G
	4430/415	without hose	F 1/2"G	F 1/2"G
	4430/416	10m 5/8" (993/310)	F 3/4"G	M 3/4"G
	4430/417	8m 3/4" (973/308)	F 3/4"G	M 3/4"G
S. 430 SUCTION	430/41/AS	10m 1/2" (963/11)	F 1/2"G	M 1/2"G
S. 530 150 bar	530/40	without hose	F 1/2"G	F 1/2"G
	530/41	20m 1/2" (963/20)	F 1/2"G	M 1/2"G
	530/42	25m 1/2" (963/25)	F 1/2"G	M 1/2"G
S. 530 100 bar	530/415	without hose	F 1"G	F 1"G
	530/416	12m 3/4" (973/312)	F 3/4"G	M 3/4"G

OVERALL DIMENSIONS

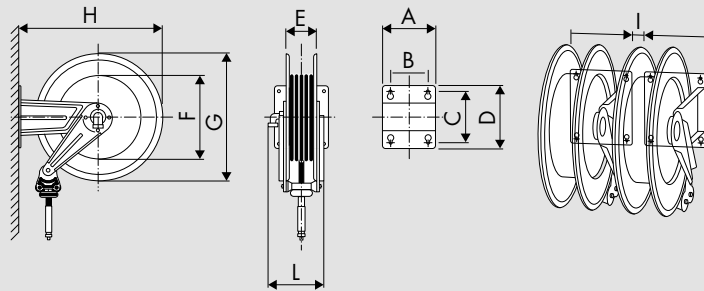

Series	A	B	C	D	E	F	G	H	I	L	1-m <sup>3</sup>	Kg
430	186	140	196	226	115	261	420	460	20	215	0,098	from 16 to 22,5
530	203	153	220	258	115	328	510	560	20	230	0,120	from 22 to 31,5

## EXAMPLE OF INSTALLATION

Arms may be easily adjusted in different positions depending on the needs

