

**Ratio 45:1**  
**Flow rate 4400 g/min**





P/N OE91F/451

## AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 900

P/N	OE91F/451	
Seals	PU	
Compatible fluids	Greases, high viscosity oils	
Suction tube upper body	Carbon steel	
Suction tube	Carbon steel	
Air inlet connection	F 1/2" G	
Fluid outlet connection	F 1/2" G	
Flow rate	g/min	4400
Max air consumption 8 bar	m <sup>3</sup> /min	1,6
Noise level	dB	80
Air max pressure	bar	8
Suitable for drums	Kg	180 - 220
Packing	No. - m <sup>3</sup>	1 - 0,070
Weight	Kg	19
Dimensions (A - B - C)	cm	44,5 - 94 - 4,5

**Atex 94/9**  
**II 3 GD c TX**

OVERALL DIMENSIONS

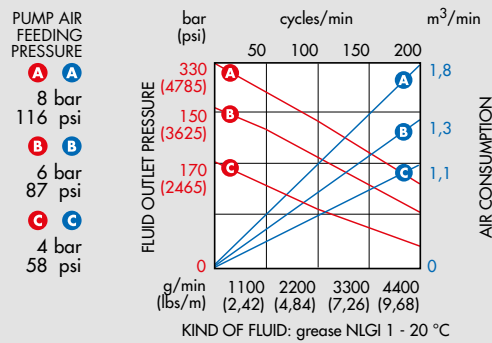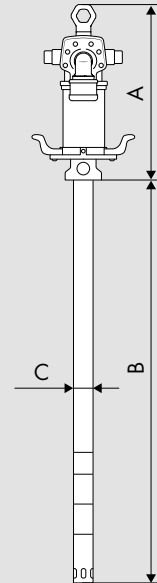

**Ratio 70:1**  
**Flow rate 3000 g/min**



P/N OE91C/701

## AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 900

P/N	OE91C/701	
Seals	PU	
Compatible fluids	Greases, high viscosity oils	
Suction tube upper body	Aluminium	
Suction tube	Carbon steel	
Air inlet connection	F 1/2" G	
Fluid outlet connection	F 1/2" G	
Flow rate	g/min	3000
Max air consumption 8 bar	m <sup>3</sup> /min	1,6
Noise level	dB	80
Air max pressure	bar	8
Suitable for drums	Kg	180 - 220
Packing	No. - m <sup>3</sup>	1 - 0,070
Weight	Kg	19
Dimensions (A - B - C)	cm	43 - 94 - 4,5

**Atex 94/9**  
**II 3 GD c TX**

OVERALL DIMENSIONS

