

Ratio 75:1
Flow rate 4400 g/min





P/N OE116F/751

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 1200

P/N	OE116F/751	
Seals	PU	
Compatible fluids	Greases, high viscosity oils	
Suction tube upper body	Carbon steel	
Suction tube	Carbon steel	
Air inlet connection	F 1/2"	
Fluid outlet connection	F 1/2"	
Flow rate	g/min	4400
Max air consumption 8 bar	m ³ /min	2,8
Noise level	dB	80
Air max pressure	bar	8
Suitable for drums	180 - 220	
Packing	No. - m ³	1 - 0,070
Weight	Kg	21
Dimensions (A - B - C)	cm	44,5 - 94 - 4,5

Atex 94/9
II 3 GD c TX

OVERALL DIMENSIONS

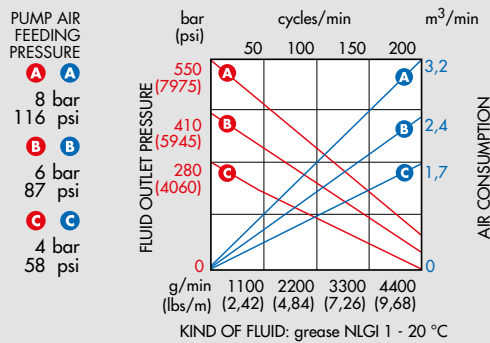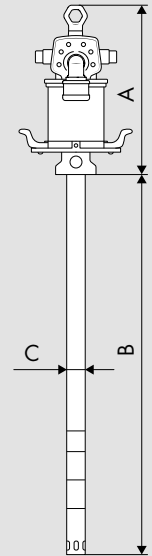

Ratio 40:1
Flow rate 10000 g/min



P/N OE116F/401

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 1200

P/N	OE116F/401	
Seals	PU	
Compatible fluids	High viscosity oils and greases	
Suction tube upper body	Carbon steel	
Suction tube	Carbon steel	
Air inlet connection	bsp	F 1/2"
Fluid outlet connection	bsp	F 1/2"
Flow rate	g/min	10.000
Max air consumption 8 bar	m ³ /min	4,6
Noise level	dB	80
Air max pressure	bar	8
Suitable for drums	180 - 220	
Packing	No. - m ³	1 - 0,090
Weight	Kg	25
Dimensions (A - B - C)	cm	44,5 - 94 - 5,08

Atex 94/9
II 3 GD c TX

OVERALL DIMENSIONS

