

Ex Atex 94/9
II 3 GD c X
(only for series 4430 ABS)

IIB 2 GD c T4 T135°C X



Supplied with:


- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in galvanized steel or s. steel AISI 304
- "Polyurethane" seals
- central shaft in galvanized steel or stainless steel AISI 304
- inlet hose 0,6 m to connect the hose reel to the system (standard on the versions with hose)
- shock proof drum in painted steel or ABS

For the SWIVELLING version add the suffix "/SO" at the P/N.
For example 430/50/SO

INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 430 600 bar	430/50	without hose	F 3/8"G	F 1/2"G
S. 430 400 bar	430/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	430/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	430/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	430/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G
S. 4430 ABS 600 bar	4430/50	without hose	F 3/8"G	F 1/2"G
S. 430 ABS 400 bar	4430/51	12m 1/4" (935/13)	F 3/8"G	M 1/4"G
	4430/52	18m 1/4" (935/18)	F 3/8"G	M 1/4"G
	4430/55	10m 3/8" (957/10)	F 3/8"G	M 1/4"G
	4430/56	15m 3/8" (957/15)	F 3/8"G	M 1/4"G
S. 530 600 bar	530/50	without hose	F 3/8"G	F 1/2"G
S. 530 400 bar	530/51	20m 3/8" (957/20)	F 3/8"G	M 1/4"G
	530/52	25m 3/8" (957/25)	F 3/8"G	M 1/4"G

OVERALL DIMENSIONS

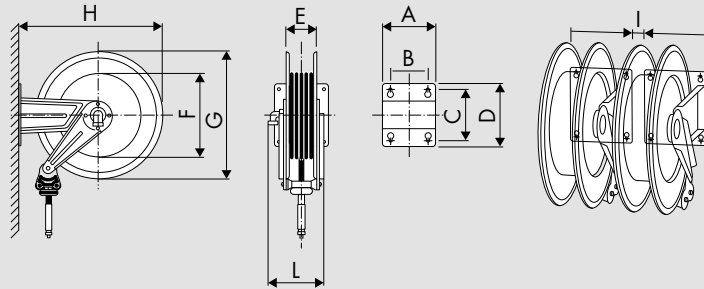

Series	A	B	C	D	E	F	G	H	I	L	1-m ³	Kg
430	186	140	196	226	115	261	420	460	20	215	0,098	from 16 to 22,5
530	203	153	220	258	115	328	510	560	20	230	0,120	from 22 to 31,5

EXAMPLE OF INSTALLATION

Arms may be easily adjusted in different positions depending on the needs

