

Supplied with:


- Polythane hose with brass coupling
- brass swivel joint
- Viton® seals
- central shaft in galvanized steel
- 1,5 m inlet hose to connect at the system



SWIVELLING WALL SUPPORT WITH BAYONET HOOKING

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 260	260/11	11m 8x12 (911/11)	M1/4"G	M1/4"G
	260/12	11m 6x10 (901/11)	M1/4"G	M1/4"G

OVERALL DIMENSIONS

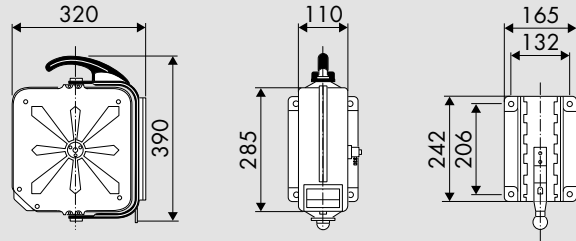


No.1 packing m³ 0,025 kg 6,5

SWIVELLING SIMPLE WALL SUPPORT

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 260	261/11	11m 8x12 (911/11)	M1/4"G	M1/4"G
	261/12	11m 6x10 (901/11)	M1/4"G	M1/4"G

OVERALL DIMENSIONS

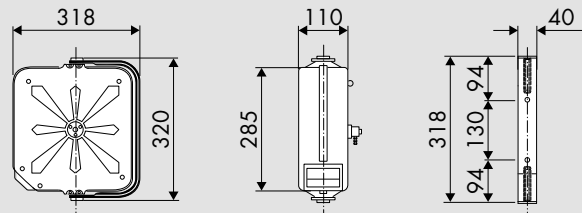


No.1 packing m³ 0,025 kg 6



P/N 260/01


Wall bracket with bayonet hooking. The placing of several brackets in the service points allows the hose reel to be easily moved to the various workstations.

To prevent removal or theft of the hose reel it can be locked with a bolt or padlock




EXAMPLE OF INSTALLATION

Standard installation on the wall



Bench installation



Ceiling installation

