

**Ex** Atex 94/9  
II 3 GD c X

IIB 2 GD c T4 T135°C X  
(only for P/N 430/10 -  
P/N 530/10)



**Supplied with:**


- hose in black synthetic rubber with galvanized steel coupling
- brass swivel joint
- Viton® seals
- central shaft in galvanized steel or stainless steel AISI 304
- inlet hose 0,6 m to connect the hose reel to the system (standard on the versions with hose)
- shock proof drum in painted steel or ABS

For the **SWIVELLING** version add the suffix **"/SO"** at the P/N.  
For example 430/10/SO

## INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 430	430/10	without hose	F 1/2"G	F 1/2"G
	430/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	430/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	430/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	430/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 4430 ABS	4430/10	without hose	F 1/2"G	F 1/2"G
	4430/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	4430/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	4430/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	4430/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 530	530/10	without hose	F 1/2"G	F 1/2"G
	530/11	20m 1/2" (962/20)	F 1/2"G	M 1/2"G
	530/12	25m 1/2" (962/25)	F 1/2"G	M 1/2"G

**OVERALL DIMENSIONS**

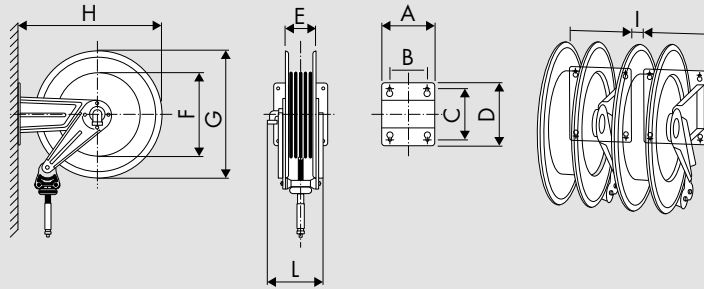

Series	A	B	C	D	E	F	G	H	I	L	1-m <sup>3</sup>	Kg
430	186	140	196	226	115	261	420	460	20	215	0,098	from 16 to 22,5
530	203	153	220	258	115	328	510	560	20	230	0,120	from 22 to 31,5

## EXEMPLE TO USE

