

Ex Atex 94/9
II 3 GD c X

IIB 2 GD c T4 T135°C X
(only for P/N 440/10)



Supplied with:


- hose in black synthetic rubber with galvanized steel coupling
- swivel joint in brass or galvanized steel
- Viton® or Polyurethane seals
- central shaft in galvanized steel
- inlet hose from 0,6 m to 1m to connect the hose reel to the system (standard on the versions with hose)
- internal shock proof drum in painted steel or ABS

For the **SWIVELLING** version add the suffix **"/SO"** at the P/N.
For example: 440/40/SO

INDUSTRIAL HOSE REELS IN PAINTED STEEL

	P/N	Hose supplied	Connection	
			inlet	outlet
S. 440	440/10	without hose	F 1/2"G	F 1/2"G
	440/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	440/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	440/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	440/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G
S. 4440 ABS	4440/10	without hose	F 1/2"G	F 1/2"G
	4440/11	15m 1/2" (962/15)	F 1/2"G	M 1/2"G
	4440/12	12m 3/8" (952/13)	F 1/2"G	M 3/8"G
	4440/13	18m 3/8" (952/19)	F 1/2"G	M 3/8"G
	4440/14	10m 1/2" (962/10)	F 1/2"G	M 1/2"G

OVERALL DIMENSIONS

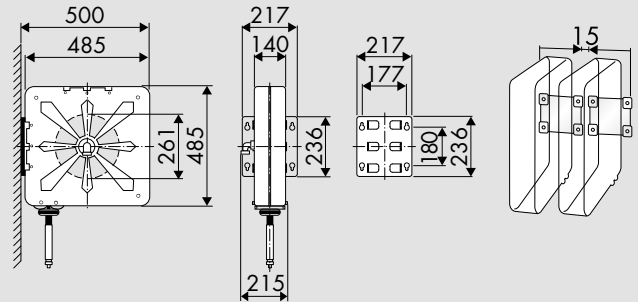

No.1 packing m³ 0,111 kg from 23 to 29



CONNECTION HOSES

P/N 901/11	Hose M 1/4" x F 1/4"	▶ ø 6x10 mm	▶ 11m	▶ 20 bar
P/N 911/11	Hose M 1/4" x F 1/4"	▶ ø 8x12 mm	▶ 11m	▶ 20 bar
P/N 911/2	Hose M 1/2" x F 1/2"	▶ ø 8x12 mm	▶ 1,5m	▶ 20 bar
P/N 952/13	Hose M 1/2" x F 1/2"	▶ ø 3/8"	▶ 12m	▶ 20 bar
P/N 952/19	Hose M 1/2" x F 1/2"	▶ ø 3,8"	▶ 18m	▶ 20 bar
P/N 962/10	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 10m	▶ 20 bar
P/N 962/15	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 15m	▶ 20 bar
P/N 962/20	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 20m	▶ 20 bar
P/N 962/25	Hose M 1/2" x F 1/2"	▶ ø 1/2"	▶ 25m	▶ 20 bar

P/N 260/01

Wall bracket with bayonet hooking. The placing of several brackets in the service points allows the hose reel to be easily moved to the various workstations.

