

Ratio 50:1
Flow rate 1500 g/min




P/N OE62041


P/N OE62095

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 600


P/N	OE62041	OE62048	OE62074	OE62095
Seals	PU			
Compatible fluids	Greases, medium-high viscosity			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	330	330	330
Noise level	dB	81	81	81
Air max pressure	bar	8	8	8
Suitable for drums	Kg	16 - 20	20 - 30	50 - 60
Packing	No. - m ³	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	4,6	4,8	6,1
Dimensions (A - B - C)	cm	26,5 - 41 - 3	26,5 - 48 - 3	26,5 - 74 - 3

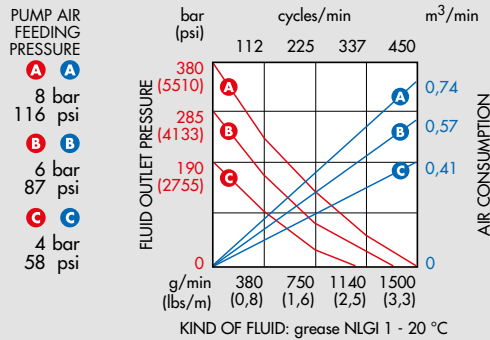

OVERALL DIMENSIONS



Ratio 65:1
Flow rate 1900 g/min

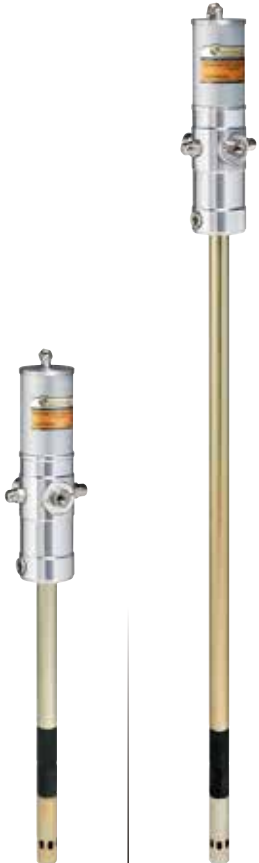


P/N OE63041

P/N OE63095

AIR-OPERATED PUMPS FOR DISTRIBUTION GREASE S. 700

P/N	OE63041	OE63048	OE63074	OE63095
Seals	PU			
Compatible fluids	Greases, medium-high viscosity			
Suction tube upper body	Aluminium			
Suction tube	Carbon steel			
Air inlet connection	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
Fluid outlet connection	F 3/8" G	F 3/8" G	F 3/8" G	F 3/8" G
Air working pressure	bar	6 - 8	6 - 8	6 - 8
Average air consumption	l/min	440	440	440
Noise level	dB	81	81	81
Air max pressure	bar	8	8	8
Suitable for drums	Kg	16 - 20	20 - 30	50 - 60
Packing	No. - m ³	1 - 0,010	1 - 0,010	1 - 0,020
Weight	Kg	5,9	6,1	7,4
Dimensions (A - B - C)	cm	33,5 - 41 - 3	33,5 - 48 - 3	33,5 - 74 - 3

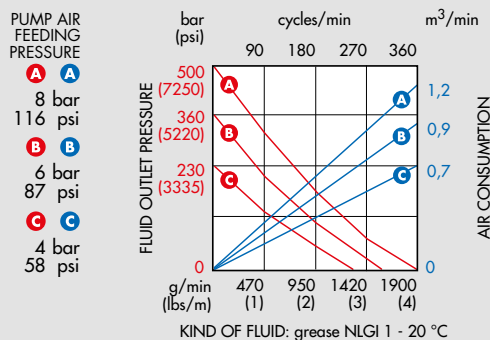

OVERALL DIMENSIONS

